



ZONE	REV	DESCRIPTION	DATE	APPROVED
	-	SEE DCN 6401.	13-05-16	BLB

INPUT VOLTS: 18-32VDC, 28VDC NOMINAL
OUTOUT VOLTS: 5VDC
RATED OUTPUT CURRENT: .90A
OPERATING TEMPERATURE RANGE: -40° ~ +85°.
EFFICIENCY: 80-90%

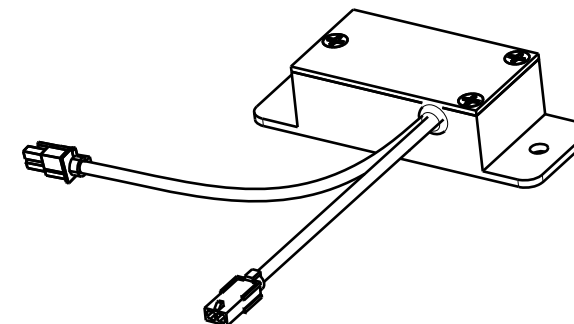

ISOMETRIC VIEW


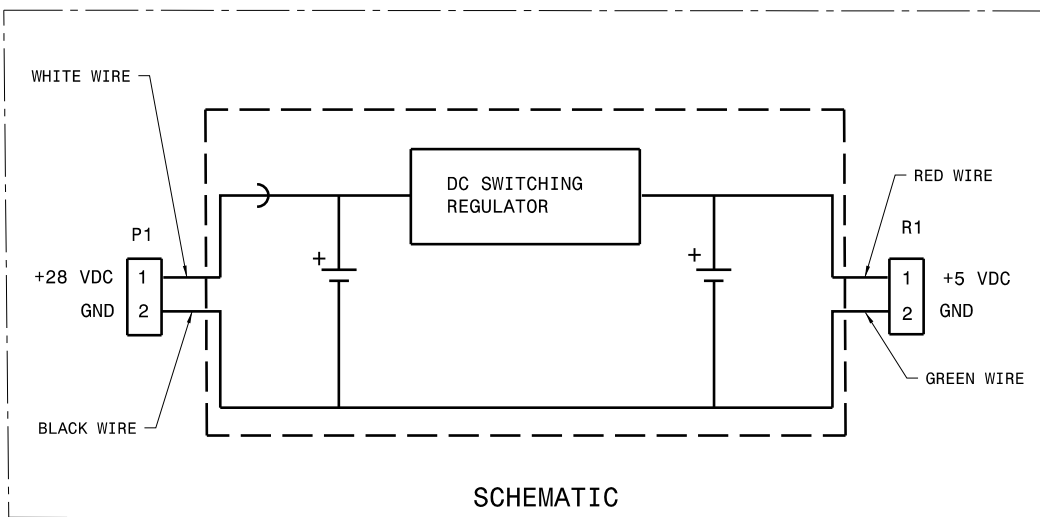


SCHEMATIC

[illegible]

THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF BIRK AEROSYSTEMS CORPORATION. BIRK AEROSYSTEMS CORPORATION RESERVES ALL PATENT, PROPRIETARY, DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS.

ZONE	REV	DESCRIPTION	DATE	APPROVED
	-	SEE DCN 6401.	13-05-16	BLB

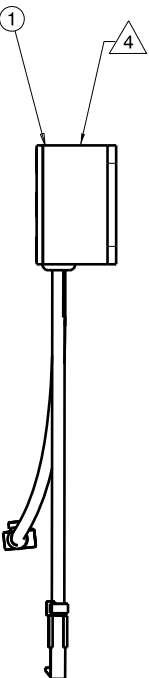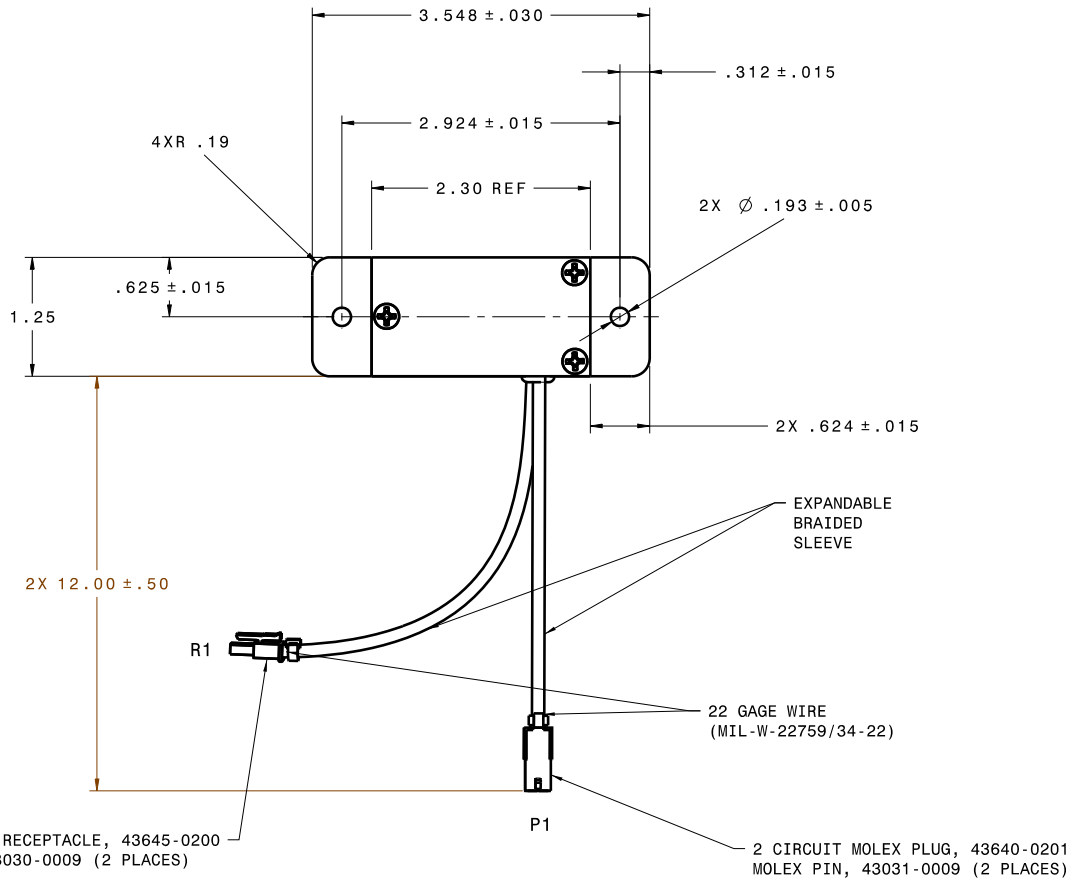

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES $\pm .1/16$ $\pm .005$ $\pm 1/2^\circ$ $\pm .005$ $\pm .010$ DO NOT SCALE DRAWING		CONTRACT NO.		BIRK AEROSYSTEMS CORPORATION GARDEN GROVE, CALIFORNIA 92843	
DRAWN JMB		DATE 13-05-16		TITLE	
CHECKED BLB		13-05-16		POWER SUPPLY	
ENGR JMB		13-05-16		SIZE CAGE CODE DWG. NO.	
ISSUED CLB		13-05-16		C 1XE65 PS18150	
TREATMENT		FILE NO. PS18150/PV2		SCALE 1/1 WT. SHEET 2	